04

FRAMING PROJECT

Wood framing is a common construction technique in residential buildings, typically using dimensional lumber to form the structural support for walls, floors, and roofs. Methods of wood framing include platform framing and balloon framing. The purpose of this proj- ect is to familiarize students with platform framing in residential construction. Working in teams, they re- search, design, and construct a small-scale section de- tailing key structural elements. For this project, team members produced both digital and physical models of their projects using the chosen floor plan, with Revit or other modeling software. This project is based on Louis Kahn's Fisher House, emphasizing the under- standing of structural systems and the organization of residential spaces through wood framing techniques.

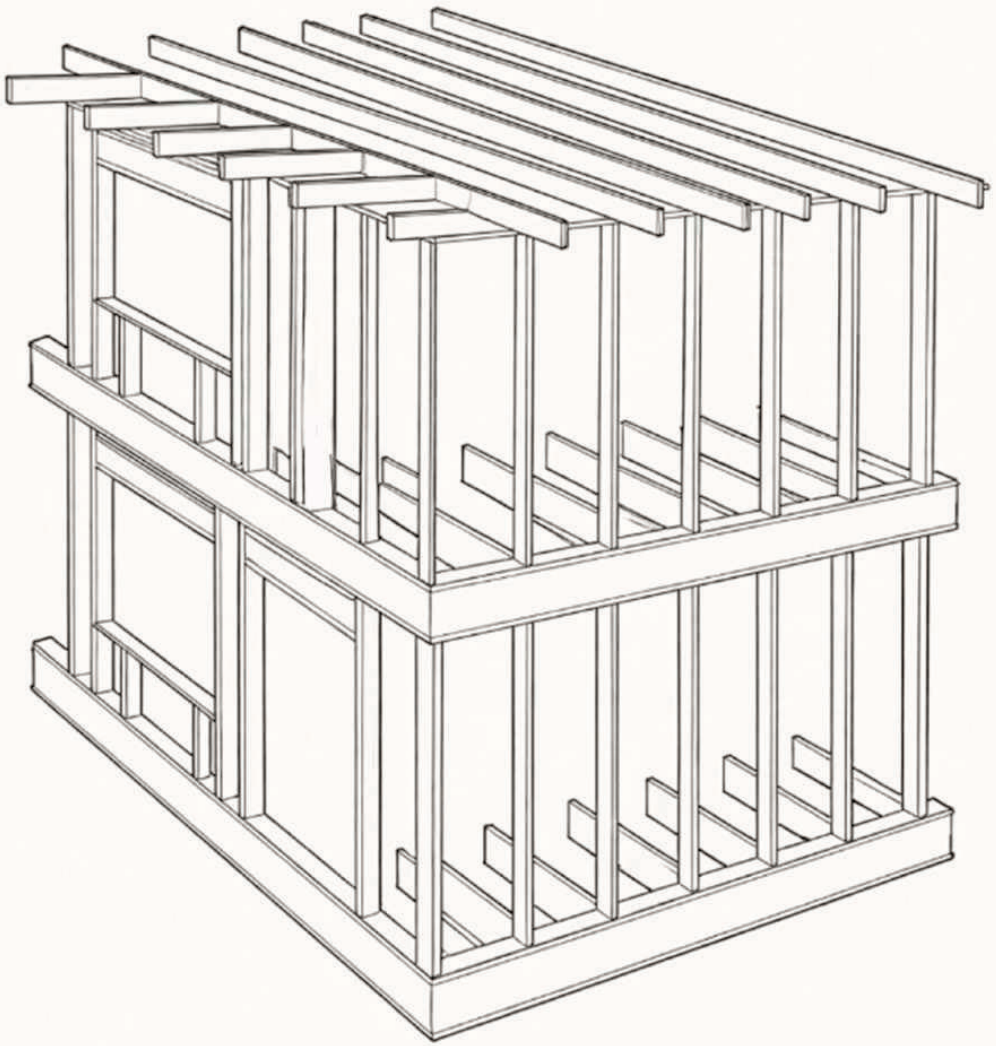

DIAGRAM + SECTION

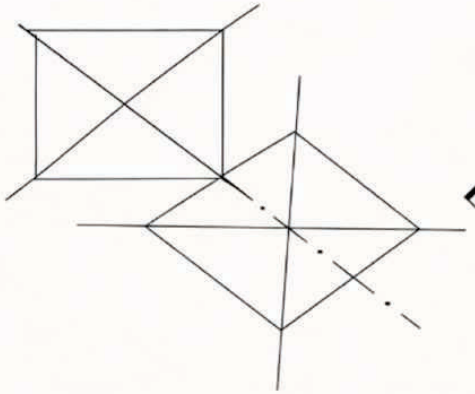

PROPORTION

A simplified composition of primary cubic forms reveals the modular grid and the relationship between structure, circulation, and spatial order. Interlocking geometric volumes organize the house into served and servant spaces, establishing a clear spatial hierarchy and balanced proportions.

Wall-to-floor section detail illustrating the relationship between structural framing, insulation layers, and interior finish. The drawing emphasizes material layering and load transfer through joists, studs, and headers.

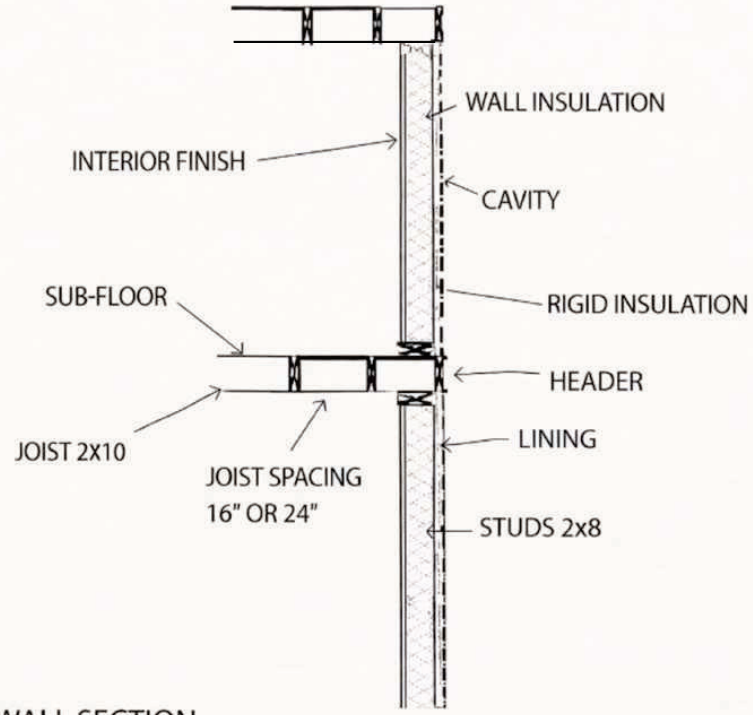

WALL SECTION

PROCESS

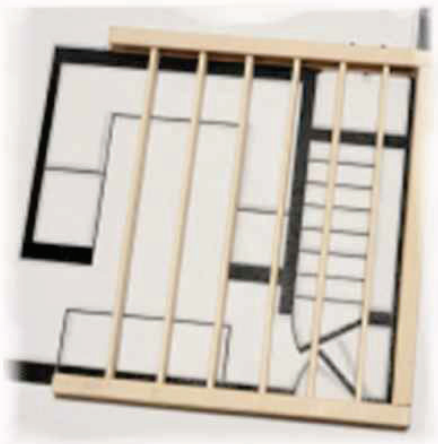

Floor plan translated into a measured base, establishing structural grid and wall placement.

Primary vertical studs installed to define perimeter and structural rhythm.

Perspective #1

Perspective #2 Horizontal members and floor framing were added to reinforce the spatial

Second-level framing is introduced, beginning to articulate vertical hierarchy.

FINAL

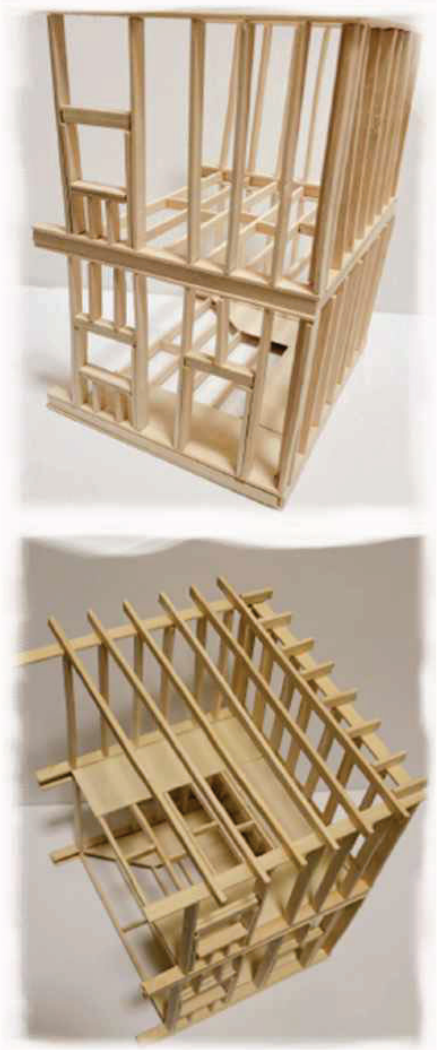

All framing components unified, expressing load-bearing logic and construction sequence.

Final structural model demonstrating proportion, rhythm, and tectonic clarity.